
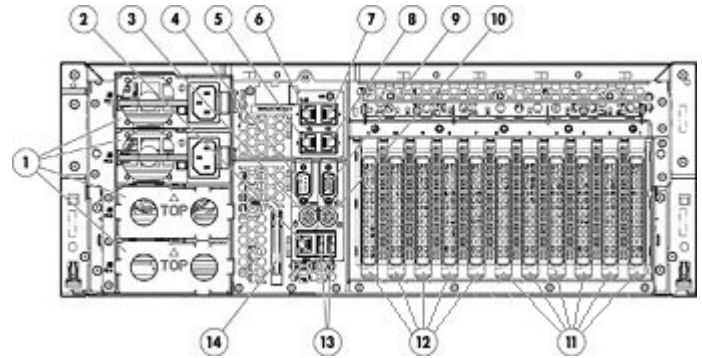


### Overview

Traditionally, mission-critical RAS (Reliability, Availability and Serviceability) features have been associated with RISC (Reduced Instruction Set Computing) systems. HP has designed an eco-system of RAS functionalities that has raised the bar for the HP ProLiant DL580 G7. The HP ProLiant DL580 G7 continues to deliver best-in-class HP performance, manageability, and reliability features with the latest Intel processor technology and it is the ideal choice for customers that are ready to deploy Large Databases that require scale-up compute processing, large memory and I/O intensive applications.

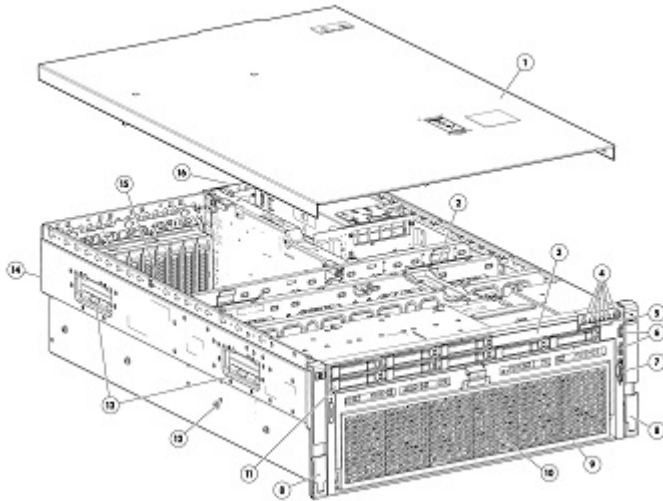

#### Front View:

1. Quick Removal Access Panel
2. 4 Hot Plug Redundant Fans Standard on all models
3. HP Slim SATA DVD ROM Optical Drive
4. Front Panel LED Display and Power Button
5. Slide-out Systems Insight Display
6. Two front accessible USB 2.0 ports
7. One front video port
8. Quick release levers for fast server access
9. Front accessible Processor and memory drawer
10. Support for up to four Intel® Xeon® Processors
11. Support for up to 8 Small Form-Factor (SFF) SAS, Serial ATA (SATA) or SSD drives
12. Universal Tool-less "Snap In" Sliding Rail Solution
13. Server Lifting Handles
14. 4U (7" Height) Rack Form Factor
15. Up to 11 slots supported; all full-length/full-height

#### Rear View:

1. Hot Plug Redundant Power Supplies (2 or 4 depending on the model)
2. Integrated Lights-Out 3 port
3. Mouse port
4. Serial Port
5. Gigabit NIC Ports
6. Gigabit NIC Ports
7. Gigabit NIC Ports
8. Gigabit NIC Ports
9. Video Port
10. Keyboard port
11. PCI-Express or PCI-X option (slots 1-6)
12. PCI-Express slots (slots 7-11)
13. Two USB ports
14. Service tool

### What's New

- Updating supported options.

### Standard Features

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

#### Processor

One or more of the following depending on model

#### Ten-Core Processors

Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor  
Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor  
Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor  
Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor

#### Eight-Core Processors

Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor  
Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor  
Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor  
Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) Processor  
Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) Processor  
Intel® Xeon® L7555 (1.86GHz/8-core/24MB/95W) Processor

#### Six-Core Processors

Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor  
Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) Processor  
Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) Processor  
Intel® Xeon® X7542 (2.66GHz/6-core/18MB/130W) Processor

#### Quad-Core Processors

Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) Processor

**NOTE:** New Intel Microarchitecture with Intel Virtualization Technology FlexMigration. Industry Standard Intel® 7500 Chipset with four high-speed interconnects up to 6.4GT/s.

#### Cache Memory

One of the following depending on model

30MB (1 x 30MB) Level 3 cache

**NOTE:** For E7-8867L and E7-4870 Processors

24MB (1 x 24MB) Level 3 cache

**NOTE:** For E7-8837, E7-4860, E7-4850, E7-4830, X7560, and L7555 Processors.

18MB (1 x 18MB) Level 3 cache

**NOTE:** For E7-4820, E7-4807, X7550, E7540, X7542, and E7520 Processors.

12MB (1 x 12MB) Level 3 cache

**NOTE:** For E7530 Processor.

#### Chipset

Industry Standard Intel® 7500 Chipset

**NOTE:** For more information regarding Intel chipsets, please see the following URL:  
<http://www.intel.com/products/server/chipsets/>

#### Upgradeability

Upgradeable to quad (4) processors

### Standard Features

<b>Memory Protection</b>	Advanced ECC
	Double Data Device Correction - DDDC
	<b>NOTE:</b> Intel® Xeon® E7-48xx/88xx processor series powered only.
	Mirrored Memory
	Online Spare Memory

<b>Memory</b>	Type	PC3-10600R DIMMs (DDR3)
One of the following depending on Model	Standard (2P Models)	16GB (4 x 4GB)
	Standard (4P Model - E7540)	32GB (8 x 4GB)
	Standard (4P Models - X7560, X7550)	64GB (16 x 4GB)
	Standard (2P Models - E7-4830, E7-4807)	64 (8 x 8GB)
	Standard (4P Models - E7-4870, E7-4850)	128GB (16 x 8GB)
	Maximum	2TB (64 x 32GB)*
		* Intel® Xeon® Processor E7 series powered only, 1TB max on 7500 series

<b>Network Controller</b>	HP NC375i Integrated Quad Port Gigabit Server Adapter
	<b>NOTE:</b> Optional Dual Port 10GbE upgrade (replaces two 1G ports)

### Expansion Slots

**NOTE:** Up to 11 slots supported; all full-length/full-height. Standard: 2 PCI-E 2.0 x8, 3 PCI-E 2.0 x4.

**NOTE:** The primary video controller needs to be located in the Main I/O board slots 7-11 providing video during boot. A video controller installed in an I/O expansion slot 1-6 cannot be the primary controller. It will not have video during boot but will provide video once OS and drives load.

Expansion Slots (Main IO Board standard)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	N/A	N/A	N/A	N/A	N/A	N/A
	2	N/A	N/A	N/A	N/A	N/A	N/A
	3	N/A	N/A	N/A	N/A	N/A	N/A
	4	N/A	N/A	N/A	N/A	N/A	
	5	N/A	N/A	N/A	N/A	N/A	
	6	N/A	N/A	N/A	N/A	N/A	
	7	PCI Express Gen2	x4	x8	O/OA	FH/FL	

### Standard Features

8	PCI Express Gen2	x4	x8	0/09	FH/FL
9	PCI Express Gen2	x8	x16	0/07	FH/FL
10	PCI Express Gen2	x4	x8	0/01	FH/FL
11	PCI Express Gen2	x8	x16	0/05	FH/FL

\* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

### Expansion Slots

Expansion Slots with IO Expander (combination PCI-X, PCI-e and 300W GPU)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	PCI-X	64-bit	N/A	82/01	FH/FL	100MHz
	2	PCI-X	64-bit	N/A	82/02	FH/FL	100MHz
	3	PCI Express Gen2	x16	x16	80/07	FH/FL	
	4	PCI Express Gen2	x4	x8	80/01	FH/FL	
	5	N/A	N/A	N/A	N/A	N/A	N/A
	6	PCI Express Gen2	x16	x16	80/03	FH/FL	
	7	PCI Express Gen2	x4	x8	0/0A	FH/FL	
	8	PCI Express Gen2	x4	x8	0/09	FH/FL	
	9	PCI Express Gen2	x8	x16	0/07	FH/FL	
	10	PCI Express Gen2	x4	x8	0/01	FH/FL	
	11	PCI Express Gen2	x8	x16	0/05	FH/FL	

\* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

### Expansion Slots



### Standard Features

Expansion Slots with I/O Expander (standard PCI-e option)	Expansion Slot #	Technology	Width	Connector Width*	Bus / Dev Number**	Form Factor	Notes
	1	PCI Express Gen1	x4	x8	80/00	FH/FL	
	2	PCI Express Gen2	x8	x16	80/09	FH/FL	
	3	PCI Express Gen2	x8	x16	80/07	FH/FL	
	4	PCI Express Gen2	x4	x8	80/01	FH/FL	
	5	PCI Express Gen2	x8	x16	80/05	FH/FL	
	6	PCI Express Gen2	x8	x16	80/03	FH/FL	
	7	PCI Express Gen2	x4	x8	0/0A	FH/FL	
	8	PCI Express Gen2	x4	x8	0/09	FH/FL	
	9	PCI Express Gen2	x8	x16	0/07	FH/FL	
	10	PCI Express Gen2	x4	x8	0/01	FH/FL	
	11	PCI Express Gen2	x8	x16	0/05	FH/FL	

\* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

### Storage Controller

One of the following depending on Model

Base Models HP Smart Array P410i/512 MB FBWC Controller

High Performance Models HP Smart Array P410i/1G FBWC Controller

The Flash Backed Write Cache (FBWC) increases cache data retention capabilities from two days of existing battery backed write cache (BBWC) to infinite data retention.

- Standard on all Models
- Transportable data protection
- Increases overall controller performance

### Standard Features

<b>Internal Storage Devices</b>	Diskette Drive	None
	Optional Optical Drive	HP Slim SATA DVD ROM Optical Drive <b>NOTE:</b> Standard on Xeon Processor 7500 series models
	Hard Drives	None ship standard
	Hard Disk Drive Backplane	Internal SAS backplane supports up to eight SFF hard disk drives

---

<b>Maximum Internal Storage</b>	Hot Plug SFF SAS	9.6TB	8 x 1.2TB
	Hot Plug SFF SATA	8.0TB	8 x 1TB
	Hot Plug SFF SSD	960GB	8 x 120GB
	Hot Plug SFF SAS SSD	6.4TB	8 x 800GB
	Hot Plug SFF SATA SSD	3.2TB	8 x 400GB

**NOTE:** There is an extra internal SSD slot available as well.

---

<b>Interfaces</b>	Serial	1
	Video	1 front; 1 rear
	Network RJ-45	4
	iLO 3 Remote Management	1
	Keyboard	1
	Pointing Device (Mouse)	1
	SD Slot	1
	USB 2.0 Ports	6 total: 2 front; 2 rear; 2 internal

---

<b>Industry Standard Compliance</b>	ACPI 2.0. Compliant
	PCIE 2.0 Compliant
	PXE Support
	WOL Support
	Physical Address Extension (PAE) Support
	Microsoft® Logo certifications
	USB 2.0 Support

---

<b>Server Power Cords</b>	<b>NOTE:</b> If customers require a local power cord, they can check the power cord matrix for the appropriate county specific sku. Please see the following power cord matrix for details: <a href="http://www.hp.com/go/powercordmatrix">http://www.hp.com/go/powercordmatrix</a>
---------------------------	--

---

### Standard Features

#### Power Supply

One of the following depending on Model

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit

**NOTE:** Supported on the E7-4870, E7-4850, E7-4830 and E7-4807 Models

HP 1200W Common Slot Silver Hot Plug Power Supply Kit

**NOTE:** Supported on the X7560, X7550, E7540, E7530, E7520 Models

**NOTE:** Two Hot Plug Power Supplies ship standard with 2P Models. Four Hot Plug Power Supplies ship standard with 4P Models.

Power Supply Requirement Override

**NOTE:** The HP ProLiant DL580 G7 does an inventory of the system configuration to determine what level of redundancy the power supply configuration supports based on some configuration assumptions. The level of redundancy will be reported during the system power on. For planning purposes you can use the Power Advisor ([www.hp.com/go/proliant-energy-efficient](http://www.hp.com/go/proliant-energy-efficient) or [www.hp.com/go/hppoweradvisor](http://www.hp.com/go/hppoweradvisor)) which is more accurate to determine the power requirements. Also, there is an RBSU override switch capability that allows the user to override the base setting if the Power Advisor indicates redundancy with their configuration.

---

#### System Fans

Four Hot Plug redundant fans standard (3+1)

---

#### Operating Systems and Virtualization Software Support for ProLiant Servers

[Microsoft Windows Server](#)

[Red Hat Enterprise Linux \(RHEL\)](#)

[SUSE Linux Enterprise Server \(SLES\)](#)

[Oracle Solaris](#)

[VMware](#)

[Citrix XenServer](#)

**NOTE:** For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page <http://www.hp.com/support/DL580G7>

---

#### Graphics

Integrated ATI ES1000 with 64MB embedded video SDRAM  
Max Resolution 1280 x 1024 x 16M color

---

#### Form Factor

Rack (4U = 7 inches), ships with Quick Deploy Sliding Rail System, an ambidextrous cable management arm and quick release levers for fast and easy serviceability and in-rack tool-less access to major components. Space saving form factor (4U) provides space efficiencies while providing maximum deployment flexibility.

---

#### HP Insight Management

HP Service Pack for ProLiant

HP Service Pack for ProLiant (SPP) and HP Smart Update Manager (HP SUM) provide a comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HP server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation, HP SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that HP provides 12 months of support for each Service Pack for ProLiant release.

### Standard Features

The user experience around HP SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HP SUM and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HP SUM application provides a straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HP SUM provides the tools to optimize stability and consistency throughout the company. While HP SUM and the SPP recommend the combinations of firmware and system software that HP has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the BladeSystem enclosure components (Onboard Administrator and Virtual Connect). This testing ensures the highest quality as well as providing the input for HP SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.

**NOTE:** The Service Pack for ProLiant (which includes HP SUM) can be downloaded from [www.hp.com/go/spp/download](http://www.hp.com/go/spp/download). More information can be found: <http://www.hp.com/go/SmartUpdate>, [www.hp.com/go/spp](http://www.hp.com/go/spp) and <http://www.hp.com/go/hpsum>

#### HP Insight Foundation

Insight Foundation is being baselined at version v8.70 which means the following:

- Its Media Kit (contains 2 SmartStart CDs, the Firmware DVD, and the Management DVD) will continue to ship with all supported ProLiant G7 or earlier BTO servers until the last supported server is no longer shipping.
- The Media Kit will not be updated past version 8.70.
- ProLiant G7 or earlier CTO servers are able to order the Media Kit with the understanding that the media is not updated. Please check specific server QuickSpecs for availability of CTO Kit.
- PSP and Firmware DVD downloads will be updated through 2Q 2012 at the HP Insight Foundation Suite for ProLiant downloads tab: <http://www.hp.com/go/foundation>

Customers are urged to use the replacement product, HP Service Pack for ProLiant, instead of Insight Foundation Suite which is found at these location: [www.hp.com/go/spp](http://www.hp.com/go/spp)  
[www.hp.com/go/spp/download](http://www.hp.com/go/spp/download)

#### HP Integrated Lights-Out (iLO)

HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand



### Standard Features

with HP Systems Insight Manager, Insight Control and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: [www.hp.com/go/iLO](http://www.hp.com/go/iLO)

---

**Intelligent Manageability** HP Systems Insight Manager  
SmartStart  
Redundant ROM  
Remote Flash ROM  
Management Agents  
Integrated Management Log (IML)  
Automatic Server Recovery-2 (ASR-2)  
ROM-Based Setup Utility (RBSU)  
Dynamic Sector Repairing (with Smart Array Controllers)  
Drive Parameter Tracking (with Smart Array Controllers)  
Pre-Failure Warranty (covers processors, SAS hard drives and memory)  
Redundant/adaptive load balancing NIC Support  
Hot Spare Boot

**NOTE:** Upon the event of a failed processor in a multi-processing environment, the system will automatically reboot and use the remaining good processor(s).

---

**HP Insight Online** HP Insight Online is a new capability available through the HP Support Center portal for one stop, secure access to product and HP support information specific to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. [www.hp.com/go/insightonline](http://www.hp.com/go/insightonline)

---

**HP Proactive Insight experience** Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: [www.hp.com/go/proactiveinsightexperience](http://www.hp.com/go/proactiveinsightexperience)

---

**Security** Power-on password  
Keyboard password  
External USB port enable/disable  
Network Server Mode  
Serial interface control  
Administrator's password  
Removable optical drive

### Standard Features

#### Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

### Optional Features

<b>HP Insight management</b>	HP Insight Control	<p>HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <a href="http://www.hp.com/go/insightcontrol">http://www.hp.com/go/insightcontrol</a>.</p> <p>HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: <a href="http://www.hp.com/services/insight">http://www.hp.com/services/insight</a>.</p>
	HP iLO Advanced	<p>HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: <a href="http://www.hp.com/go/iloadvance">http://www.hp.com/go/iloadvance</a></p>
	HP Insight Dynamics for ProLiant	<p>HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.</p> <p><b>NOTE:</b> For more information, visit: <a href="http://www.hp.com/go/insightdynamics">http://www.hp.com/go/insightdynamics</a></p>

### Optional Features

#### Solutions

The ProLiant DL580 G7 server is an enterprise class, 4 socket server designed for maximum scalability and high availability. Its innovative chassis offers unsurpassed flexibility and serviceability in a versatile form factor. Based upon the latest industry standard processing, memory, I/O and networking technologies, the ProLiant DL580 G7 provides the highest levels of performance demanded by today's compute intensive applications. Unparalleled high availability features, including hot-plug and redundant components, guarantee maximum uptime. HP Integrated Lights-Out 3 (iLO3) technology allows remote administration from a standard web browser without ever having to visit the server. Within the 4U dense form factor, it's highly expandable architecture provides maximum application deployment flexibility with the ability to add PCI-Express, PCI-X, 2 - 10GB NICs and battery-backed write cache options. Innovative features, such as the ability to access processors, memory, hard drives, and power supplies while the unit remains secured in the rack, enable rapid response to service events, radically decreasing overall IT costs and server downtime.

#### Typical Usage:

Space-constrained corporate data centers and service providers

Network and I/O expandability, inbuilt availability and reliability features, advanced power management capabilities and large internal storage make DL580 G7 ideal for corporate datacenters.

#### Database, Messaging and Business Applications

Large internal storage, refined I/O slots options, high network bandwidth, new DDR3 expandable memory combined with latest Intel 8-core expandable processors in DL580 G7 provide everything necessary for today's database, messaging and business applications.

#### Virtualization and Consolidation

HP's 4S architecture, inbuilt advanced reliability and scalability features make DL580 G7 a perfect platform for virtualization and consolidation solutions. HP's Insight control offerings make it easy to manage, deploy and migrate virtualized servers with VMware or Microsoft® Virtual Server. For more solutions visit: <http://www.hp.com/solutions/proliantdl580>.

---

#### High Performance Clusters

##### HP Cluster Platforms

HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. <http://www.hp.com/go/clusters>

##### HP HPC Interconnects

High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. <http://www.hp.com/techservers/clusters/ucp/index.html>

##### HP Cluster Management Utility

HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. <http://www.hp.com/go/cmu>

---

#### Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control

### Optional Features

challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**  
Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**  
HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**  
HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**  
HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**  
Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HP StoreVirtual VSA**  
With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

**NOTE:** For more information available Storage Software including QuickSpecs, please see: [www.hp.com/go/storage/software](http://www.hp.com/go/storage/software).

---

**Factory Express Portfolio for Servers and Storage** HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

### Optional Features

**HP Simple Configurator**

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>

### Service and Support

#### Service and Support

##### **HP Technology Services for Industry Standard Servers and BladeSystem**

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

##### **What HP ProLiant and BladeSystem Services can do for you**

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs:

HP Technology Services meets business challenges with services offered in three packages -

**Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

#### Optimized Care Package

##### **Supports maintaining servers at optimum performance availability**

##### **HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner  
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

##### **HP Installation and Startup for SIM (Systems Insight Manager)**

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack  
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

##### **3-Year HP Critical Advantage**

Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment  
<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW>

**Additional Services:** Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express

#### Standard Care Package

##### **Package that maintains high level of server availability**

##### **HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner  
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

##### **HP Installation and Startup for SIM (Systems Insight Manager)**

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack  
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

### Service and Support

#### **3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service**

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

#### **3-Year , HP 24x7 Software Support for Insight Control**

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

**Additional Services:** Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

#### **Basic Care Package**

**Basic Care Package: delivers minimum recommended support service level**

#### **HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

#### **3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service**

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

**Additional Services:** Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

#### **Insight Remote Support**

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

#### **For more information**

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>



### Pre-configured Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

**NOTE:** HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

**NOTE:** If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** Not all models are available in all regions. Check with your local country HP offices for availability.

### High Performance Models

<b>HP ProLiant DL580 G7 E7-4870 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server</b> 643063-xx1	<b>Processor(s)</b> Four of the following depending on model	(4) Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processors (4) Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processors
	<b>Cache Memory</b> One of the following depending on model	30MB (1 x 30MB) Level 3 cache 24MB (1 x 24MB) Level 3 cache
<b>HP ProLiant DL580 G7 E7-4850 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server</b> 643064-xx1	<b>Memory</b> One of the following depending on model	128GB (16 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) (E7) Memory Cartridges (E7-4870, E7-4850 Models) 64GB (16 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) memory boards (X7560, X7550 Models) 32GB (8 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) memory boards (E7540 Models)
<b>HP ProLiant DL580 G7 E7-4870 4P 128GB-R Hot Plug SAS SFF BC NIC 1200W PS Server</b> 696729-xx1	<b>Network Controller</b> <b>Storage Controller</b> <b>Hard Drives</b> <b>Internal Storage</b> <b>Optical Drive</b>	HP NC375i Integrated Quad Port Gigabit Server Adapter Embedded HP Smart Array P410i/1G FBWC Controller None ship standard Up to 8.0TB of internal storage (SFF SAS) HP Slim SATA DVD ROM Optical Drive
<b>HP ProLiant DL580 G7 E7-4850 4P 128GB-R Hot Plug SAS SFF BC NIC 1200W PS Server</b> 696730-xx1	<b>Power Supply</b> One of the following depending on model <b>Fans</b> <b>Integrated Lights Out</b> <b>Insight Control</b> <b>Form Factor</b> <b>Warranty</b>	(4) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4870, E7-4850 Models)  Four Hot Plug redundant fans standard (3+1) Integrated Lights-Out 3 (iLO 3) ships standard HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates Rack 4U Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

### Pre-configured Models

#### Base Models

<p><b>HP ProLiant DL580 G7 E7-4830 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server</b> 643065-xx1</p>	<p><b>Processor(s)</b> Two of the following depending on model Up to 4 supported</p> <p><b>Cache Memory</b> One of the following depending on model</p> <p><b>Memory</b></p> <p><b>Network Controller</b></p>	<p>(2) Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processors (2) Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processors</p> <p>24MB (1 x 24MB) Level 3 cache</p>
<p><b>HP ProLiant DL580 G7 E7-4807 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server</b> 643066-xx1</p>	<p><b>Storage Controller</b></p> <p><b>Hard Drives</b></p> <p><b>Internal Storage</b></p> <p><b>Optical Drive</b></p> <p><b>Power Supply</b> One of the following depending on model</p> <p><b>Fans</b></p> <p><b>Integrated Lights Out</b></p> <p><b>Form Factor</b></p> <p><b>Warranty</b></p>	<p>64GB (8 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) (E7) Memory Cartridges (E7-4830, E7-4807 Models)</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter (643065-xx1 and 643066-xx1 Models) HP Ethernet 1Gb 4-port 331i Integrated Server Adapter (696731-xx1 and 696732-xx1 Models)</p> <p>Embedded HP Smart Array P410i/512 MB FBWC Controller</p> <p>None ship standard</p> <p>Up to 8.0TB of internal storage (SFF SAS)</p> <p>HP Slim SATA DVD ROM Optical Drive</p> <p>(2) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4830, E7-4807 Models)</p> <p>Four Hot Plug redundant fans standard (3+1)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>Rack 4U</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response</p>
<p><b>HP ProLiant DL580 G7 E7-4830 2P 64GB-R Hot Plug SAS SFF BC NIC 1200W PS Server</b> 696731-xx1</p>	<p><b>Storage Controller</b></p> <p><b>Hard Drives</b></p> <p><b>Internal Storage</b></p> <p><b>Optical Drive</b></p> <p><b>Power Supply</b> One of the following depending on model</p> <p><b>Fans</b></p> <p><b>Integrated Lights Out</b></p> <p><b>Form Factor</b></p> <p><b>Warranty</b></p>	<p>Embedded HP Smart Array P410i/512 MB FBWC Controller</p> <p>None ship standard</p> <p>Up to 8.0TB of internal storage (SFF SAS)</p> <p>HP Slim SATA DVD ROM Optical Drive</p> <p>(2) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4830, E7-4807 Models)</p> <p>Four Hot Plug redundant fans standard (3+1)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>Rack 4U</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response</p>
<p><b>HP ProLiant DL580 G7 E7-4807 2P 64GB-R Hot Plug SAS SFF BC NIC 1200W PS Server</b> 696732-xx1</p>	<p><b>Storage Controller</b></p> <p><b>Hard Drives</b></p> <p><b>Internal Storage</b></p> <p><b>Optical Drive</b></p> <p><b>Power Supply</b> One of the following depending on model</p> <p><b>Fans</b></p> <p><b>Integrated Lights Out</b></p> <p><b>Form Factor</b></p> <p><b>Warranty</b></p>	<p>Embedded HP Smart Array P410i/512 MB FBWC Controller</p> <p>None ship standard</p> <p>Up to 8.0TB of internal storage (SFF SAS)</p> <p>HP Slim SATA DVD ROM Optical Drive</p> <p>(2) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4830, E7-4807 Models)</p> <p>Four Hot Plug redundant fans standard (3+1)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>Rack 4U</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response</p>

<b>Country Code Key</b>	xx = 00	US
	xx = 20	Brazil
	xx = 29	Japan
	xx = 37	APD
	xx = 42	Europe
	xx = AA	PRC

### Configuration Information - Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

**NOTE:** Factory Integrated Models must start with a CTO Server

**NOTE:** FIO indicates that this option is only available as a factory installable option.

#### Step 1: Base Configuration

<b>HP Models</b>	HP ProLiant DL580 G7 (E7) Configure-to-order Server	643086-B21
	<b>Factory Integrated Models ship with:</b> HP NC375i Integrated Quad Port Gigabit Server Adapter Four HP DL580G7/DL980 G7 (E7) Memory Cartridges Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board Rack (4U), 7-inch <b>NOTE:</b> Power supplies need to be selected separately from Step 2 below. <b>NOTE:</b> Customers purchasing the Intel® Xeon® Processor E7 series will need to purchase the HP DL580R07 (E7) CTO Server (PN 643086-B21)	
	HP ProLiant DL580 G7 (E7) BC NIC Configure-to-order Server	643086-B22
	<b>Factory Integrated Models ship with:</b> HP Ethernet 1Gb 4-port 331i Integrated Server Adapter Four HP DL580G7/DL980 G7 (E7) Memory Cartridges Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board Rack (4U), 7-inch <b>NOTE:</b> Power supplies need to be selected separately from Step 2 below	

#### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

<b>HP Processors</b>	<b>NOTE:</b> If a 2p configuration is selected, then a single -L21 processor kit should be used. If a 3p configuration is selected, then first processor kit is -L21 and second is -B21. If a 4p configuration is selected, then first processor kit is -L21 and second and third processor kit is -B21. <b>NOTE:</b> Intel® Xeon® Processor E7-4800 series processors are supported only in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (PN 643086-B2x) and E7 series pre-configured models)	
	<b>Ten-Core Processors</b>	
	HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) FIO 2-processor Kit	643067-L21
	<b>NOTE:</b> QPI speed is 6.40 GT/s	
	HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) FIO 2-processor Kit	643069-L21
	<b>NOTE:</b> QPI speed is 6.40 GT/s	

### Configuration Information - Factory Integrated Models

HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) FIO 2-processor Kit 643071-L21  
**NOTE:** QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) FIO 2-processor Kit 643079-L21  
**NOTE:** QPI speed is 6.40 GT/s

#### Eight-Core Processors

HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) FIO 2-processor Kit 643081-L21  
**NOTE:** QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) FIO 2-processor Kit 643073-L21  
**NOTE:** QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) FIO 2-processor Kit 643075-L21  
**NOTE:** QPI speed is 5.86 GT/s

#### Six-Core Processors

HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) FIO 2-processor Kit 643077-L21  
**NOTE:** QPI speed is 4.80 GT/s

### HP Memory

#### Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500656-B21  
**NOTE:** Only supported with the Intel® Xeon® Processor 7500 series processors

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500658-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604504-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500662-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604506-B21

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit 500666-B21

HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 627812-B21

HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit 627814-B21

**NOTE:** PC3L DIMMs are only supported with the Intel® Xeon® E7-48xx/88xx processors and require (E7) memory cartridge.

**NOTE:** PC3L is a low-voltage memory.

#### Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge 644172-B21

**NOTE:** Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

### HP Power Supplies

**NOTE:** Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: [www.hp.com/go/hppoweradvisor](http://www.hp.com/go/hppoweradvisor).

HP 1200W Common Slot Silver Hot Plug Power Supply Kit 500172-B21

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 578322-B21

**NOTE:** All power supplies in a server should match. Mixing Platinum and Silver Power

### Configuration Information - Factory Integrated Models

Supplies is not supported.

**NOTE:** Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.

**NOTE:** HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to [www.hp.com/products/powercords](http://www.hp.com/products/powercords)

---

### Step 3: Choose Additional Factory Integratable Options

<b>HP Insight Software</b>	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE

**NOTE:** The Electronic software license is available in EMEA only.

---

### Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Core Options" and "Additional Options" section below.

### Core Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

<b>HP Unique Options</b>	HP DL580 G7 PCI Express Kit <b>NOTE:</b> Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4.	588137-B21
	HP DL580 G7 PCI-X Combo Express Kit <b>NOTE:</b> Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X.	588139-B21
	HP DL580G7/DL980G7 (E7) Memory Cartridge <b>NOTE:</b> Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.	644172-B21

### HP Processors

#### Ten-Core Processors

HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643067-B21
HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643069-B21
HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643071-B21
HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643079-B21

#### Eight-Core Processors

HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643081-B21
HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor Kit <b>NOTE:</b> QPI speed is 6.40 GT/s	643073-B21
HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor Kit <b>NOTE:</b> QPI speed is 5.86 GT/s	643075-B21

#### Six-Core Processors

HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor Kit <b>NOTE:</b> QPI speed is 4.80 GT/s	643077-B21
<b>NOTE:</b> Above processor kits contain one processor each.	
<b>NOTE:</b> Intel® Xeon® Processor E7-4800 series processors only supported in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (PN 643086-B2x) and E7 series pre-configured models (PNs 6430xx-xx1 & 6967xx-xx1)	

### Core Options

#### HP Memory

##### Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500656-B21
<b>NOTE:</b> Only supported with the Intel® Xeon® Processor 7500 series processors.	
HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21
HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627812-B21
HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627814-B21
<b>NOTE:</b> PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.	
<b>NOTE:</b> PC3L is a low-voltage memory.	

##### Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge	644172-B21
<b>NOTE:</b> Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.	

#### HP Optical Drives

**NOTE:** Optical drives are ejectable.

HP Slim 12.7mm SATA DVD-RW Optical Drive	481043-B21
HP Slim 12.7mm SATA DVD-ROM Optical Drive	481041-B21

#### HP Hard Drives

**NOTE:** The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

**NOTE:** Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

##### SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	718160-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	693648-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3yr Warranty Hard Drive	627117-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21

### Core Options

#### SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive 605835-B21

HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive 507610-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18004.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12244_div/12244_div.html)  
(Worldwide)

#### SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive 625609-B21

HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive 507750-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13121\\_div/13121\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13121_div/13121_div.html)  
(Worldwide)

#### 6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives

HP 120GB 6G SATA Value Endurance SFF 2.5-in Enterprise Boot 3yr Wty Solid State Drive 728726-B21

HP 80GB 6G SATA Value Endurance SFF 2.5-in Enterprise Boot 3yr Wty Solid State Drive 734366-B21

#### 6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives

HP 800GB 6G SATA Value Endurance SFF 2.5-in Enterprise Value 3yr Wty Solid State Drive 728743-B21

HP 480GB 6G SATA Value Endurance SFF 2.5-in Enterprise Value 3yr Wty Solid State Drive 728739-B21

HP 600GB 6G SATA Value Endurance SFF 2.5-in Enterprise Boot 3yr Wty Solid State Drive 739904-B21

HP 300GB 6G SATA Value Endurance SFF 2.5-in Enterprise Boot 3yr Wty Solid State Drive 739894-B21

HP 240GB 6G SATA Value Endurance SFF 2.5-in Enterprise Value 3yr Wty Solid State Drive 728735-B21

#### 6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Wty Solid State Drive 730065-B21

HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Wty Solid State Drive 730063-B21

HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Wty Solid State Drive 730061-B21

HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Wty Solid State Drive 730059-B21

#### 6G SAS ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive 690823-B21

HP 400GB 6G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream 3yr Warranty Solid State Drive 690821-B21



### Core Options

HP 200GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive 690819-B21

**NOTE:** Cable is not included for Non-hot plug Drives. SSD cable option kit sku: 661778-B21

#### 6G SAS SLC Hot Plug Enterprise Performance Solid State Drives

HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632494-B21

HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632492-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/14038\\_div/14038\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html) (Worldwide)

#### Hard Drive Cables

HP DL580/DL585/DL980 G7 SSD Cable Kit 661778-B21

### HP Networking

#### Gigabit Ethernet Adapters

HP NC112T PCI Express Gigabit Server Adapter 503746-B21

HP NC360T PCI-E Dual Port Gigabit Server Adapter 412648-B21

HP NC364T PCI-E Quad Port Gigabit Server Adapter 435508-B21

HP NC365T 4-port Ethernet Server Adapter 593722-B21

HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter 394793-B21

HP NC373T PCI-E Multifunction Gigabit Server Adapter 394791-B21

HP NC375T PCI Express Quad Port Gigabit Server Adapter 538696-B21

HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter 458492-B21

HP Ethernet 1Gb 4-port 331T Adapter 647594-B21

HP Ethernet 1Gb 2-port 332T Adapter 615732-B21

HP Ethernet 1Gb 2-port 361T Adapter 652497-B21

#### 10 Gigabit Ethernet Adapters

**NOTE:** A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HP NC524SFP Dual Port 10GbE Module 489892-B21

HP NC523SFP 10Gb 2-port Server Adapter 593717-B21

HP NC550SFP Dual Port 10GbE Server Adapter 581201-B21

HP NC552SFP 10Gb 2-port Ethernet Server Adapter 614203-B21

HP Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

HP Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information: [www.hp.com/go/ProLiantNICs](http://www.hp.com/go/ProLiantNICs)

### Core Options

<b>HP InfiniBand</b>	HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA	592520-B21
	QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA	583211-B21
	HP Infiniband FDR/Ethernet 10Gb/40Gb 2-port 544QSFP Adapter	649281-B21

**NOTE:** Please see the QuickSpecs for additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13078\\_div/13078\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13078_div/13078_div.html)

---

<b>HP I/O Expansion Options</b>	HP DL580 G7 PCI Express Kit	588137-B21
	<b>NOTE:</b> Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4.	
	HP DL580 G7 PCI-X Combo Express Kit	588139-B21
	<b>NOTE:</b> Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X	
	Suggested Slot placement:	
	1. Slot 3 PCIe2 x 16 (16,8,4,2,1)	
	2. Slot 6 PCIe2 x 16 (16,8,4,2,1)	
	3. Slot 9 PCIe2 x 16 (8,4,2,1)	
	4. Slot 11 PCIe2 x 16 (8,4,2,1)	
	<b>NOTE:</b> Slot 9 and 11 are physically a x16 slot but will operate electrically at x8.	

---

<b>HP Power Supplies</b>	<b>NOTE:</b> Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: <a href="http://www.hp.com/go/hppoweradvisor">www.hp.com/go/hppoweradvisor</a> .	
	HP 1200W Common Slot Silver Hot Plug Power Supply Kit	500172-B21
	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit	578322-B21
	<b>NOTE:</b> All power supplies in a server should match. Mixing Platinum and Silver Power Supplies is not supported.	
	<b>NOTE:</b> Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.	
	<b>NOTE:</b> HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to <a href="http://www.hp.com/products/powercords">www.hp.com/products/powercords</a>	

### Additional Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

#### HP Insight Software

#### HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License C6N27A

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License C6N28ABE

**NOTE:** The Electronic software license is available in EMEA only.

HP Insight Control Server Provisioning Media Kit BD883A

HP Insight Management Media Kit C6N31A

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

**NOTE:** Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

**NOTE:** For additional license options please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12631\\_div/12631\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html)

#### HP Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU E6U59ABE

**NOTE:** The Electronic software license is available in EMEA only.

HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU E6U64ABE

**NOTE:** The Electronic software license is available in EMEA only.

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License 512485-B21

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates BD505A

**NOTE:** For additional license options please see the QuickSpecs at:

[http://h18004.www1.hp.com/products/quickspecs/14276\\_div/14276\\_div.html](http://h18004.www1.hp.com/products/quickspecs/14276_div/14276_div.html)

**NOTE:** For more information, visit: <http://www.hp.com/go/ilo>

### Additional Options

#### High Performance Clusters

#### HP Cluster Management Utility

HP Insight Cluster Management Utility 1yr 24x7 Flexible License

QL803B

**NOTE:** This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP Insight Cluster Management Utility 3yr 24x7 Flexible License

BD476A

**NOTE:** These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media

BD477A

**NOTE:** For additional license kits please see the QuickSpecs at:

[http://h18004.www1.hp.com/products/quickspecs/12612\\_div/12612\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html)

#### HP I/O Accelerator Options

#### Second Generation Accelerators

HP 365GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers

673642-B21

HP 785GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers

673644-B21

HP 1205GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers

673646-B21

HP 2410GB Multi Level Cell G2 PCIe ioDrive2 Duo for ProLiant Servers

673648-B21

HP 3TB G2 FH/HL PCIe ioDrive2 IO Accelerator for ProLiant Servers

721458-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13587\\_div/13587\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13587_div/13587_div.html)  
(Worldwide)

#### HP PCIe Workload Accelerator Options

#### Mainstream Endurance (ME) PCIe Workload Accelerators

HP 1.4TB HH/HL Mainstream Endurance (ME) PCIe Workload Accelerator

729307-B21

HP 700GB HH/HL Mainstream Endurance (ME) PCIe Workload Accelerator

729305-B21

#### High Endurance (HE) PCIe Workload Accelerators

HP 700GB HH/HL High Endurance (HE) PCIe Workload Accelerator

708090-B21

HP 350GB HH/HL High Endurance (HE) PCIe Workload Accelerator

708088-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/14528\\_div/14528\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14528_div/14528_div.html)  
(Worldwide)

### Additional Options

<b>HP Graphics Options</b>	<p>HP DL580/DL585/DL980 Power Cable Kit <span style="float: right;">631660-B21</span></p> <p><b>NOTE:</b> The HP ProLiant DL580 G7 can support up to 4 (225W) or 3(300W) Graphic Cards and/or GPGPU Accelerator Options (x16 PCIe add-in cards in slots 11 and 9 will down-train electrically to x8 PCIe which may result in reduced performance.)</p> <p><b>NOTE:</b> An option kit will be required per Graphic Card and/or GPGPU Accelerator Options.</p> <p><b>NOTE:</b> Depending on the number of GPGPUs required, customers will need to purchase the following I/O expansion boards: DL580G7 PCI-X / PCI Express I/O Exp. Kit: PN: 588139-B21 (Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X).</p>
----------------------------	---

<b>HP Security</b>	<p>HP Trusted Platform Module Option <span style="float: right;">488069-B21</span></p> <p><b>NOTE:</b> The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: <a href="http://www.hp.com/go/TPM">www.hp.com/go/TPM</a>.</p> <p><b>NOTE:</b> ProLiant OS pre-installed units will come with the partition required for TPM deployment.</p> <p><b>NOTE:</b> The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.</p>
--------------------	--

<b>HP Storage Controllers</b>	<p><b>SAS Controllers</b></p> <p><b>Smart Array P212 Controller</b></p> <p>HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller <span style="float: right;">462828-B21</span></p> <p>HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller <span style="float: right;">462834-B21</span></p> <p><b>Smart Array P410 Controller</b></p> <p>HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller <span style="float: right;">462862-B21</span></p> <p>HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller <span style="float: right;">462864-B21</span></p> <p>HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller <span style="float: right;">578230-B21</span></p> <p>HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller <span style="float: right;">572532-B21</span></p> <p><b>Smart Array P411 Controller</b></p> <p>HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller <span style="float: right;">462830-B21</span></p> <p>HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller <span style="float: right;">462832-B21</span></p> <p>HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller <span style="float: right;">572531-B21</span></p> <p>HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller <span style="float: right;">578229-B21</span></p> <p><b>Smart Array P812 Controller</b></p> <p>HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller <span style="float: right;">487204-B21</span></p> <p><b>Optional Upgrades</b></p> <p>HP 512MB P-Series Battery Backed Write Cache Upgrade <span style="float: right;">462967-B21</span></p> <p><b>NOTE:</b> Supported on HP Smart Array P411 Controller only.</p>
-------------------------------	--

### Additional Options

HP 1GB Flash Backed Cache	534562-B21
HP 512MB Flash Backed Write Cache	534916-B21
HP 256MB P-series Cache Upgrade	462968-B21
HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License	516471-B21

**NOTE:** This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13203\\_div/13203\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html)  
(Smart Array P212 Controller)

[http://h18000.www1.hp.com/products/quickspecs/13201\\_div/13201\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html)  
(Smart Array P410 Controller)

[http://h18000.www1.hp.com/products/quickspecs/13202\\_div/13202\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html)  
(Smart Array P411 Controller)

[http://h18000.www1.hp.com/products/quickspecs/13558\\_div/13558\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13558_div/13558_div.html)  
(Smart Array P812 Controller)

[http://h18000.www1.hp.com/products/quickspecs/13200\\_div/13200\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13200_div/13200_div.html)  
(Smart Array Advanced Pack)

#### SAS HBA

HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter	614988-B21
---	------------

**NOTE:** This is a 2 x4 External Port HBA

**NOTE:** This is only approved for the HP P2000 G3 SAS Modular Smart Array.

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18004.www1.hp.com/products/quickspecs/13651\\_div/13651\\_div.html](http://h18004.www1.hp.com/products/quickspecs/13651_div/13651_div.html)  
(SC08e 6Gb HBA)

#### SCSI HBA

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
--	------------

**NOTE:** Recommended HBA for SCSI tape drive connect.

**NOTE:** Please see the following QuickSpecs for additional information:

[http://h18000.www1.hp.com/products/quickspecs/12566\\_div/12566\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html)  
(SC11Xe HBA)

### HP Power Cords

HP C13 - SEV 1011 CH 250V 10Amp 1.83m Power Cord	AF565A
HP C13 - DK-2.5A DK 250V 10Amp 1.83m Power Cord	AF566A
HP C13 - CEE-VII EU 250V 10Amp 1.83m Power Cord	AF568A
HP C13 - BS-1363A UK/HK/SG 250V 10Amp 1.83m Power Cord	AF570A
HP C13 - CEI-23-50 IT/CL 250V 10Amp 1.83m Power Cord	AF571A
HP C13 - SABS-164 ZA 250V 10Amp 2.5m Power Cord	AF567A

### Additional Options

#### HP Tape Backup

**NOTE:** For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK> and [www.hp.com/go/ebs](http://www.hp.com/go/ebs).  
**NOTE:** For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

HP StoreEver LTO-4 Ultrium 1840 SAS External Tape Drive	EH861B
HP StoreEver LTO-5 Ultrium 3280 SAS Internal Tape Drive	EH899B
<b>NOTE:</b> For installation into 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.	
HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A
HP StoreEver LTO-6 Ultrium 6650 SAS Internal Tape Drive	EH963A
HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A
HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A
HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A

#### HP Tape Storage Systems **HP StoreEver MSL6480**

HP StoreEver MSL6480 Scalable Base Module	QU625A
<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html">http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html</a> (Worldwide)	

#### HP Disk Backup

**NOTE:** For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/storage/SPOCK>.

##### HP StoreOnce Backup systems

HP StoreOnce 2620 iSCSI Backup	BB852A
HP StoreOnce 4220 Backup	BB855A

##### HP D2D Backup Systems with Backup Data Deduplication

HP StoreOnce D2D4112 Backup System	EH993C
HP StoreOnce D2D2504i Backup System	EJ002C

##### HP RDX Removable Disk Backup System

HP RDX320 USB3.0 External Disk Backup System	B7B63A
HP RDX500 USB3.0 Internal Disk Backup System	B7B64A
HP RDX500 USB3.0 External Disk Backup System	B7B66A
HP RDX1000 USB3.0 Internal Disk Backup System	B7B67A
HP RDX1000 USB3.0 External Disk Backup System	B7B69A
HP RDX 2TB USB3.0 Internal Disk Backup System	E7X52A
HP RDX 2TB USB3.0 External Disk Backup System	E7X53A

### Additional Options

**NOTE:** Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13036\\_div/13036\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html)  
(Worldwide)

---

#### HP Disk Storage Systems **Disk Enclosures**

HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle

E7W32A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13404\\_div/13404\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html)  
(Worldwide)

---

#### HP Storage Options

##### **Storage Fibre Channel HBA**

**NOTE:** The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

##### **Brocade Fibre Channel HBAs**

HP 81B 8Gb 1-port PCIe Fibre Channel Host Bus Adapter

AP769B

HP 82B 8Gb 2-port PCIe Fibre Channel Host Bus Adapter

AP770B

##### **Emulex Fibre Channel HBAs**

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter

AJ762B

HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter

AJ763B

HP SN1000E 16Gb 2-port PCIe Fibre Channel Host Bus Adapter

QR559A

HP SN1000E 16Gb 1-port PCIe Fibre Channel Host Bus Adapter

QR558A

HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter

C8R38A

HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter

C8R39A

##### **QLogic Fibre Channel HBAs**

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter

AK344A

HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter

AJ764A

HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter

QW971A

HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter

QW972A

##### **Converged Network Adapter**

HP CN1100E Dual Port Converged Network Adapter

BK835A

HP CN1000Q Dual Port Converged Network Adapter

BS668A



### Additional Options

#### HP Disk Storage Systems **Disk Enclosures**

HP D2600 Disk Enclosure	AJ940A
HP D2700 Disk Enclosure	AJ941A

**NOTE:** Please see the QuickSpecs for additional options and configuration information at: [http://h18000.www1.hp.com/products/quickspecs/13404\\_div/13404\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html) (Worldwide)

#### HP Uninterruptible Power Systems **HP Rack-mountable UPS**

##### **HP R1500 G3 Uninterruptible Power Supply (UPS)**

HP R1.5kVA G3 1U NA Uninterruptible Power System	AF469A
HP R1.5kVA G3 1U JP/TW Uninterruptible Power System	AF470A
HP R1.5kVA G3 1U INTL Uninterruptible Power System	AF471A

**NOTE:** Please see the QuickSpecs for additional information: [http://h18000.www1.hp.com/products/quickspecs/14059\\_div/14059\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14059_div/14059_div.html) (Worldwide)

##### **HP R/T3000 G2 Uninterruptible Power System (UPS)**

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System	AF466A
HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System	AF467A
HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power System	AF468A

**NOTE:** Please see the QuickSpecs for additional information: [http://h18000.www1.hp.com/products/quickspecs/14058\\_div/14058\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14058_div/14058_div.html) (Worldwide)

##### **R5000 Uninterruptible Power System (UPS)**

HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A
HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A

**NOTE:** Please see the QuickSpecs for additional information: [http://h18000.www1.hp.com/products/quickspecs/14109\\_div/14109\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14109_div/14109_div.html) (Worldwide)

##### **R7000 Uninterruptible Power System (UPS)**

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A
HP R5KVA and R7KVA 3U Extended Runtime Module	AF464A

**NOTE:** Please see the QuickSpecs for additional information: [http://h18000.www1.hp.com/products/quickspecs/14110\\_div/14110\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14110_div/14110_div.html) (Worldwide)

##### **HP Rackmountable 3 Phase Uninterruptible Power Systems (UPS R8000/3 and R12000/3)**

HP R8000/3 8000kVA Three Phase NA 6U Rackmount Uninterruptible Power System	AF431A
HP R8000/3 8000kVA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF432A
HP R12000/3 12000VA Three Phase NA 6U Rackmount Uninterruptible Power System	AF429A
HP R12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF430A

### Additional Options

**NOTE:** Please see the QuickSpecs for additional information:

[http://h18000.www1.hp.com/products/quickspecs/12857\\_div/12857\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12857_div/12857_div.html)  
(Worldwide)

**NOTE:** For additional information on HP Uninterruptible Power Systems please go to:

[www.hp.com/servers/rackups](http://www.hp.com/servers/rackups).

**NOTE:** For additional information on sizing your server, please reference:

<http://www.upssizer.com>.

**NOTE:** Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: [www.hp.com/products/powercords](http://www.hp.com/products/powercords).

<b>HP Basic Power Distribution Units (pPDU)</b>	<p><b>HP Basic Power Distribution Unit: 1U/0U Version</b></p> <p>HP 1.9kVA 120 Volt 12 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M54A</span></p> <p>HP 3.6kVA 200-240 Volt 12 Outlet WW Basic Power Distribution Unit <span style="float: right;">H5M56A</span></p> <p><b>HP Basic Power Distribution Unit: Half Height Version</b></p> <p>HP 2.8kVA 120 Volt 18 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M55A</span></p> <p>HP 3.6kVA 200-240 Volt 20 Outlet WW Basic Power Distribution Unit <span style="float: right;">H5M57A</span></p> <p>HP 4.9kVA 208 Volt 20 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M58A</span></p> <p>HP 7.3kVA 230 Volt 20 Outlet INTL Basic Power Distribution Unit <span style="float: right;">H5M68A</span></p> <p>HP 8.6kVA 208 Volt Three Phase 18 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M61A</span></p> <p><b>HP Basic Power Distribution Unit: Mid Height Version</b></p> <p>HP 4.9kVA 208 Volt 30 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M59A</span></p> <p>HP 7.3kVA 230 Volt 30 Outlet INTL Basic Power Distribution Unit <span style="float: right;">H5M70A</span></p> <p>HP 8.3kVA 208 Volt 36 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M60A</span></p> <p>HP 11kVA 230 Volt 36 Outlet INTL Basic Power Distribution Unit <span style="float: right;">H5M71A</span></p> <p>HP Hardwired 200-240 Volt 36 Outlet WW Basic Power Distribution Unit <span style="float: right;">H5M75A</span></p> <p>HP 5.7kVA 208 Volt Three Phase 27 Outlet NA/JP Dual Voltage Basic Power Distribution Unit <span style="float: right;">H5M63A</span></p> <p>HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Dual Voltage Basic Power Distribution Unit <span style="float: right;">H5M64A</span></p> <p>HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Basic Power Distribution Unit <span style="float: right;">H5M62A</span></p> <p>HP 11kVA 400 Volt Three Phase 30 Outlet INTL Basic Power Distribution Unit <span style="float: right;">H5M72A</span></p> <p><b>HP Basic Power Distribution Unit: Full Height Version</b></p> <p>HP 11kVA 400 Volt Three Phase 42 Outlet INTL Basic Power Distribution Unit <span style="float: right;">H5M73A</span></p> <p>HP 11kVA 400 Volt Three Phase 42 Outlet NA Basic Power Distribution Unit <span style="float: right;">H5M67A</span></p> <p><b>HP Basic Power Distribution Unit: 480/277 Volt Version</b></p> <p>HP 13.2kVA 480 Volt Three Phase 15 Outlet NA Basic Power Distribution Unit <span style="float: right;">H3X07A</span></p> <p>HP 19.9kVA 480 Volt Three Phase 30 Outlet NA Basic Power Distribution Unit <span style="float: right;">H3X08A</span></p> <p>HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer <span style="float: right;">H3X09A</span></p>
---	--

### Additional Options

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/14557\\_div/14557\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14557_div/14557_div.html)  
 (Worldwide)

**NOTE:** Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: [www.hp.com/go/rackandpower](http://www.hp.com/go/rackandpower).

#### HP Remote Monitoring Power Distribution Units (mPDU)

##### HP Remote Monitored Power Distribution Unit: 1U Version

HP 2.8kVA 120 Volt 12 Outlet NA/JP Monitored Power Distribution Unit	D9N43A
HP 3.6kVA 200-240 Volt 12 Outlet WW Monitored Power Distribution Unit	D9N46A
HP 4.9kVA 208 Volt 12 Outlet NA/JP Monitored Power Distribution Unit	D9N44A

##### HP Remote Monitored Power Distribution Unit: Half Height Version

HP 3.6kVA 200-240 Volt 16 Outlet WW Monitored Power Distribution Unit	D9N45A
---	--------

##### HP Remote Monitored Power Distribution Unit: Mid Height Version

HP 4.9kVA 208 Volt 24 Outlet NA/JP Monitored Power Distribution Unit	D9N47A
HP 7.3kVA 230 Volt 24 Outlet INTL Monitored Power Distribution Unit	D9N48A
HP 8.6kVA 208 Volt Three Phase 21 Outlet NA/JP Monitored Power Distribution Unit	D9N51A
HP 5.7kVA 208 Volt Three Phase 21 Outlet NA/JP Dual Voltage Monitored Power Distribution Unit	D9N52A
HP 8.6kVA 208 Volt Three Phase 24 Outlet NA/JP Dual Voltage Monitored Power Distribution Unit	D9N53A
HP 11kVA 400 Volt Three Phase 21 Outlet INTL Monitored Power Distribution Unit	D9N55A

##### HP Remote Monitored Power Distribution Unit: Full Height Version

HP 8.3kVA 208 Volt 33 Outlet NA Monitored Power Distribution Unit	D9N49A
HP 7.3kVA 230 Volt 36 Outlet INTL Monitored Power Distribution Unit	D9N50A
HP 11kVA 400 Volt Three Phase 33 Outlet INTL Monitored Power Distribution Unit	D9N57A
HP 14.4kVA 208 Volt Three Phase 24 Outlet NA Monitored Power Distribution Unit	D9N58A
HP 16.6kVA 400 Volt Three Phase 33 Outlet NA Monitored Power Distribution Unit	D9N61A
HP 17.3kVA 208 Volt Three Phase 27 Outlet NA/JP Monitored Power Distribution Unit	D9N54A
HP 17.3kVA 208 Volt Three Phase 24 Outlet NA/JP Monitored Power Distribution Unit	D9N59A
HP 22kVA 400 Volt Three Phase 24 Outlet INTL Monitored Power Distribution Unit	D9N60A
HP 22kVA 400 Volt Three Phase 33 Outlet INTL Monitored Power Distribution Unit	D9N56A
HP 16.6kVA 400 Volt Three Phase 24 Outlet NA Monitored Power Distribution Unit	D9N62A
HP 19.9kVA 480 Volt Three Phase 30 Outlet NA Monitored Power Distribution Unit	D9N63A

##### HP Environmental Sensor for Remote Monitored PDUs

HP Environmental Sensor for Remote Monitored PDUs	E2D53A
---	--------

**NOTE:** Please see the QuickSpecs for additional information:  
[http://h18000.www1.hp.com/products/quickspecs/14669\\_div/14669\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14669_div/14669_div.html)  
 (Worldwide)

### Additional Options

<b>HP Intelligent Power Distribution Units (iPDU)</b>	<b>iPDU Core Units</b>	
	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
	HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
	HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit	AF533A
	HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A
	HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit	AF525A
	HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF526A
	HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF527A
	HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit	AF900A
	HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit	AF902A
	HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit	AF901A
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
	HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A
	HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit	AF538A
	<b>iPDU Kits with Standard Extension Bars</b>	
	HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
	HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A
	HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit	AF534A
	<b>iPDU Extension Bars</b>	
	HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	<b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html">http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html</a> (Worldwide)	

### HP Rack Options

	<b>HP TFT7600 G2 KVM Console and Monitor (TFT7600 G2)</b>	
	HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor	AZ870A
	HP TFT7600 G2 KVM Console Rackmount Keyboard UK Monitor	AZ871A
	HP TFT7600 G2 KVM Console Rackmount Keyboard DE Monitor	AZ872A
	HP TFT7600 G2 KVM Console Rackmount Keyboard FR Monitor	AZ873A
	HP TFT7600 G2 KVM Console Rackmount Keyboard IT Monitor	AZ874A
	HP TFT7600 G2 KVM Console Rackmount Keyboard ES Monitor	AZ875A
	HP TFT7600 G2 KVM Console Rackmount Keyboard DK Monitor	AZ876A
	HP TFT7600 G2 KVM Console Rackmount Keyboard NO Monitor	AZ877A
	HP TFT7600 G2 KVM Console Rackmount Keyboard SE/FI Monitor	AZ878A
	HP TFT7600 G2 KVM Console Rackmount Keyboard CH Monitor	AZ879A
	HP TFT7600 G2 KVM Console Rackmount Keyboard PT Monitor	AZ880A

### Additional Options

HP TFT7600 G2 KVM Console Rackmount Keyboard BE Monitor	AZ881A
HP TFT7600 G2 KVM Console Rackmount Keyboard JP Monitor	AZ882A
HP TFT7600 G2 KVM Console Rackmount Keyboard RU Monitor	AZ883A
HP TFT7600 G2 KVM Console Rackmount Keyboard Intl Monitor	AZ884A
HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor	AZ885A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13731\\_div/13731\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13731_div/13731_div.html)  
(Worldwide)

#### HP USB Keyboard and Mouse

HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13972\\_div/13972\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13972_div/13972_div.html)  
(Worldwide)

#### HP Server Console Switches

HP Server Console 0x2x8 Port Analog Switch	AF616A
HP Server Console 0x2x16 Port Analog Switch	AF617A
HP TAA 0x2x16xKVM Server Console G2 Switch	AF626A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/11834\\_div/11834\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html)  
(Worldwide)

#### HP Server Console Switch G2 with Virtual Media & CAC

HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM CAT5 1-pack USB Interface Adapter	336047-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13475\\_div/13475\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html)  
(Worldwide)

#### HP IP Console Switch G2 with Virtual Media & CAC

HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A

### Additional Options

HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13474\\_div/13474\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html)  
(Worldwide)

### HP USB and SD Options

#### HP Flash Media Kits for USB Drives

HP 2GB USB Flash Media Drive Key Kit	608447-B21
--------------------------------------	------------

**NOTE:** HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions.

HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
--	------------

#### HP Enterprise Mainstream Flash Media Kits for Memory Cards

HP 8GB SD Enterprise Mainstream Flash Media Kit	726113-B21
---	------------

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/13971\\_div/13971\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13971_div/13971_div.html)

#### Other USB and SD Options

HP USB Standard Keyboard DT528A ABA	DT528A#ABA
-------------------------------------	------------

### HP Care Pack Services

#### Proactive Care

**NOTE:** Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.

HP 3 year 4 hour 24x7 ProLiant DL58x Proactive Care Service	U2Z68E
---	--------

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL58x Proactive Care Service	U2Z71E
--	--------

HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Proactive Care Service	U2Z74E
--	--------

HP 3 year 6 hour Call To Repair 24x7 with Defective Media Retention ProLiant DL58x Proactive Care SVC	U2Z77E
---	--------

#### Collaborative Support

**NOTE:** Hardware break/fix plus 24x7 software diagnosis support with collaborative call management for a broad spectrum of 3rd Party software products including O/S and hypervisors. Recommended for customers procuring 3rd party SW O/S and hypervisors from the software vendors directly and deploying them on HP ProLiant servers.

HP 3 year 4 hour 24x7 ProLiant DL58x Collaborative Support	U1J48E
--	--------

HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL58x Collaborative Support	U1J51E
---	--------

### Additional Options

HP 3 year 6 hour Call To Repair 24x7 ProLiant DL58x Collaborative Support U1J54E

HP 3 year 6hr Call To Repair 24x7 with Defective Media Retention ProLiant DL58x Collaborative Support U1J57E

#### **Proactive Care Personalized Support Option**

**NOTE:** To add an onsite Account Support Manager (ASM) to Proactive Care. ASM is an assigned resource who delivers support planning and brings technical expertise and best practices advices for the customer's environment.

HP 3 year ISS ProactiveCare Personalized Support U6W98E

#### **Installation Services**

**NOTE:** Reduce the time required to get your system up and running and help minimize disruptions to your business.

HP 3 year 4 hour 24x7 ProLiant D58x Hardware Support U4608E

HP Install ProLiant DL58x Service U4617E

HP Startup ProLiant DL58x Service U4618E

HP Installation and Startup for Insight Control Server Deployment - previously Rapid Deployment Pack U5683E

**NOTE:** For more information, customer/resellers can contact:  
<http://www.hp.com/services/carepack>

### Memory

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

#### HP ProLiant DL580 G7

#### Memory Subsystem Architecture

Intel® Xeon® processor E7 and 7500 series memory architecture is designed to take advantage of multiple stages of memory interleaving to reduce latency and increase bandwidth.


Each processor contains two Memory Controllers as shown in the Processor/Memory interconnect figure below. Each Memory controller has two Scalable Memory Interface (SMI) buses operating in lockstep where each SMI bus connects to a memory buffer. The purpose of the buffer is to convert SMI to DDR3. Each buffer has two DDR3 channels and can support up to four DIMMs for a total of eight DIMMs per cartridge.

- Memory speed is not affected by number of DIMMs or ranks. All DIMMs will run at the highest possible speed for a given processor.
- DDR3 memory speed is a function of the processors QPI bus speed such that
  - Processors with a QPI speed of 6.4GT will run memory at 1066MHz
  - Processors with a QPI speed of 5.6GT will run memory at 978MHz
  - Processors with a QPI speed of 4.8GT will run memory at 800 MHz

#### DIMM Installation guidelines

Each memory cartridge can support up to 8 DIMMs, for a system total of 64 DIMMs. When installing DIMM modules in the Memory Cartridge observe the following minimum guidelines:

- UDIMMs are not supported
- Minimum allowable configuration is two DIMMs per cartridge.
- DIMMs must be installed in pairs with identical characteristics. For configuration simplicity HP recommends using identical part numbered DIMMs throughout when possible.
- DIMM pairs MUST be populated in sequence by letter designation. Install DIMM pair 1A, 8A first followed by DIMM pair 3B, 6B then DIMM pair 2C, 7C and DIMM pair 4D, 5D last.
- Maximum performance is achieved by balancing DIMM pairs by letter groupings across all memory cartridges. Such that the 1A, 8A pair is install in all memory cartridges first (see diagram below) followed by the B pair, C pair and D pair.
- AMP modes Online Sparing and Memory Mirroring have further requirements beyond these listed here. Please refer to the user guide for additional memory configuration requirements.

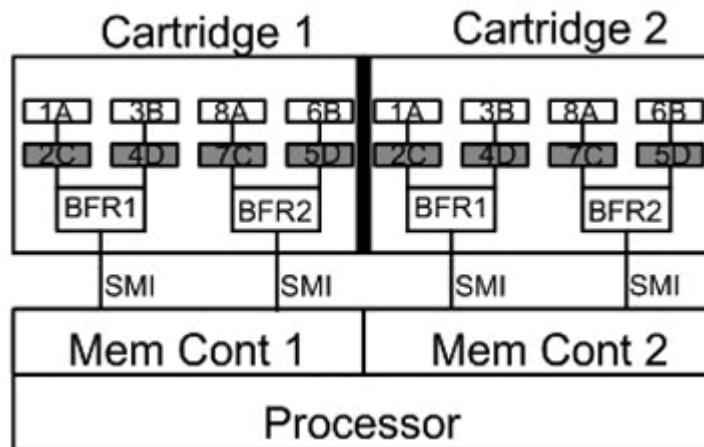

**Figure 1 Processor/Memory interconnect**

Illustration of how the processor, cartridges and DIMMs are electrically connected.



### Memory

#### Memory Cartridge population guidelines

This server contains 8 memory cartridge slots in the processor memory drawer. Observe the following guidelines:


- Populate memory cartridge slots for a processor only if the processor is installed where:
  - Processor 1 connects to cartridge slots 1 and 2.
  - Processor 2 connects to cartridge slots 3 and 4.
  - Processor 3 connects to cartridge slots 5 and 6.
  - Processor 4 connects to cartridge slots 7 and 8.
- Minimum recommended cartridge population is one cartridge per processor. For best performance two cartridges per processor are recommended.
- Processors installed without corresponding memory cartridges will incur high memory access latencies and is not recommended.
- To maximize performance in multi-processor configurations distribute the total memory capacity evenly between all processors.

#### Hemisphere mode

The architecture incorporates hemisphere mode, a high performance interleaving technology. Hemisphere mode allows interleaving between the two processor memory controllers internal to each processor.

Hemisphere mode is enabled when all processors in a system have the memory behind both memory controllers populated identically.

- To enable each processor to enter hemisphere mode it must have both cartridges installed, populated with equal memory capacities and follow the DIMM installation guidelines.

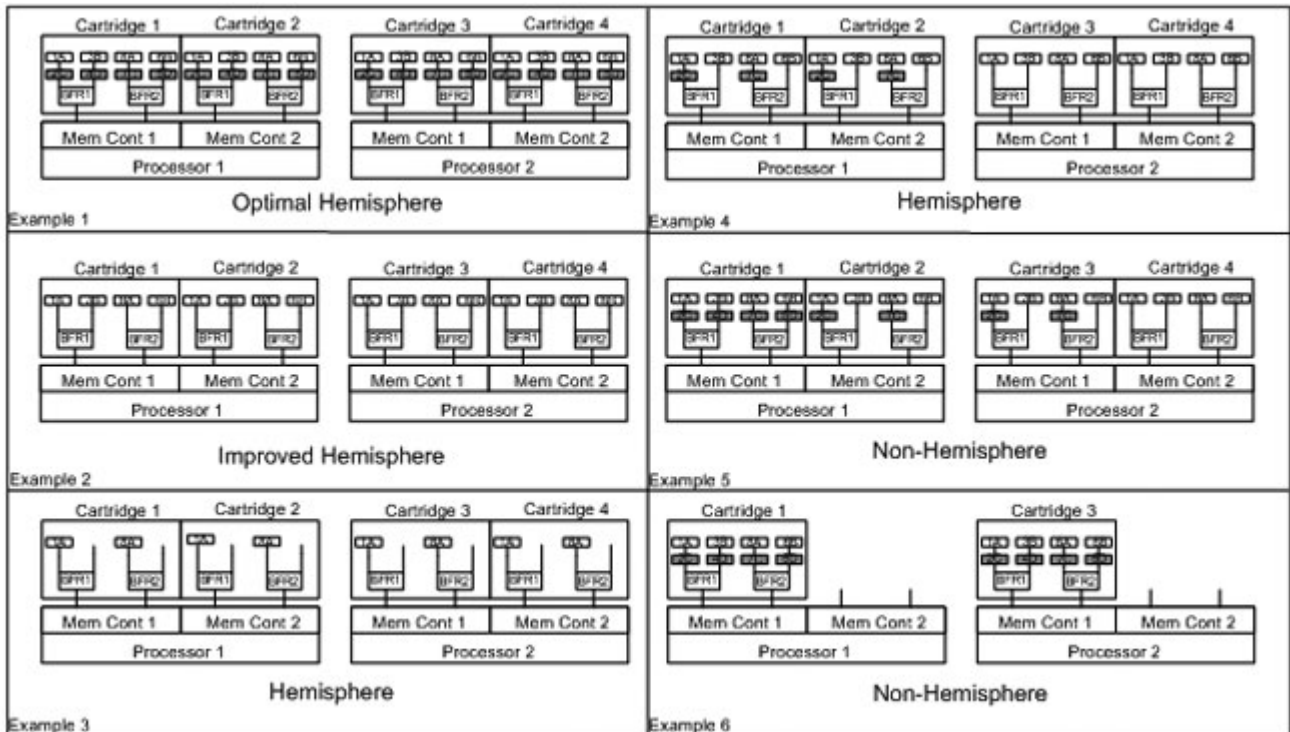

**Figure 2 Hemisphere Population Diagram**  
Examples of Hemisphere vs Non-Hemisphere populations.

### Memory

#### Memory Performance Optimization

The DL580 G7 supports 64 DIMMs across four multi-core processors. While there are many DIMM population configurations that can support any desired total memory size, optimal performance can only be achieved when DIMMs are populated to take advantage of the architecture. Reference the Figure: Hemisphere Population Diagram to achieve the best performance for a given memory/processor configuration.

- The largest contributor to maximum memory bandwidth performance is to utilize both memory controllers inside the processor. This is achieved by populating both memory cartridges for each installed processor.
- The second largest contributor to performance is to populate each DDR3 channel in each memory cartridge. To achieve this, the minimum DIMM count per cartridge is four. Maximum bandwidth is reached by fully populating all memory cartridges with the maximum number of eight DIMMs per cartridge.
- Best performance is obtained when all installed processors are enabled for Hemisphere mode. HP recommends two memory boards per processor- each one with at least 4 DIMMs- for improved memory bandwidth
- Hemisphere mode is optimum when four or eight DIMMs are installed per cartridge. Hemisphere mode can be reached with two or six DIMMs per cartridge (2 cartridges per processor) but it is not optimal configuration for Hemisphere mode.
- Plan your memory configurations using Identical DIMMs to reach your memory size target taking into account that 32 and 64 DIMM count configurations result in the highest performance. For a 4 processor example:
  - If initial memory target is 64GB then populate a 4 processor system with eight cartridges of 4 - 2GB DIMMs each for a total of 32 DIMMs. Your maximum expansion target is 128GB with 64 2GB DIMMs.
  - For 4GB DIMMs your initial memory target is 128GB using 32 DIMMs. Your maximum expansion target is 256GB with 64 DIMMs.
  - For 8GB DIMMs your initial memory target is 256GB using 32 DIMMs. Your maximum expansion target is 512GB with 64 DIMMs.
  - Maximum system memory capability is reached with an initial memory target of 512GB with 32 - 16GBDIMMs and 2TB with 64 32GB DIMMs.
- The more ranks per DIMM the higher the performance such that Quad rank DIMMs perform better than dual rank DIMMs.

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models". Only registered (RDIMM) speeds of 1066 or 1333 running at 1066 are supported and must be installed in pairs. UDIMMs are not supported.

#### HP Memory

#### Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500656-B21
<b>NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors</b>	
HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21
HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit	627812-B21
HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit	627814-B21

**NOTE:** PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.

**NOTE:** PC3L is a low-voltage memory.

#### Memory Expansion Options


### Memory

HP DL580G7/DL980G7 (E7) Memory Cartridge

644172-B21

**NOTE:** Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

### Storage

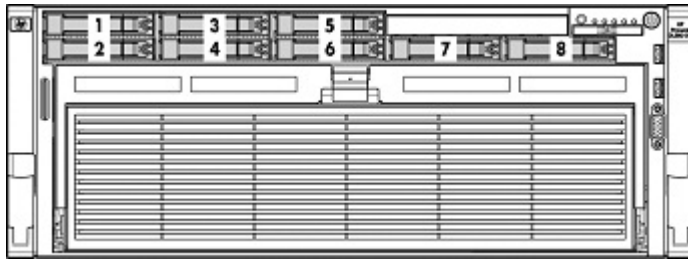

1-8 SFF SAS Internal Drive cage

### Drive Support

	Quantity Supported	Position Supported	Controller
<b>Optical Drives</b>			
Slimline DVD-ROM drive	Up to 1	1	Integrated SATA
HP Slim SATA DVD RW Optical Drive	Up to 1	1	Integrated SATA

	Quantity Supported	Position Supported	Host Controller or Adapter
<b>External Storage</b>			
D2600 Disk Enclosure	Up to 8	External	HP Smart Array P411/256MB BBWC Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P812/1G Flash Backed Cache Controller
D2700 Disk Enclosure	Up to 4	External	HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller HP Smart Array P812/1G Flash Backed Cache Controller

#### Maximum Storage Capacity - (External SAS Enclosure Attached)

Internal	9.6TB (8 x 1.2TB SFF SAS/SATA Drives)
External	960TB (80 MSA60 enclosures x 12 drive bays each x 1TB SATA Drives)

#### Tape and Disk-Based Backup

**NOTE:** For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/storage/SPOCK>.

	Position	Recommended Controller	Controller Part Number
<b>HP SCSI Tape Drives</b>	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21

### Storage

LTO-1 Ultrium 232  
 LTO-2 Ultrium 448  
 LTO-3 Ultrium 920  
 LTO-3 Ultrium 960  
 LTO4 Ultrium 1760  
 LTO-4 Ultrium 1840  
 DAT 40  
 DAT 72  
 DAT 160  
 1U Rack-Mount Kit  
 3U Rack-Mount Kit

<b>HP USB Tape Drives</b>	External	USB 2.0 Port	N/A
DAT 40			
DAT 72			
DAT 160			
DAT 320			
1U USB Rack-Mount Kit			

<b>HP SAS Tape Drives</b>	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
DAT 160			
DAT 320			
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-4 Ultrium 1760			
LTO-4 Ultrium 1840			
LTO-5 Ultrium 3000			
LTO-5 Ultrium 3280			
1U Rack-Mount Kit			
3U Rack-Mount Kit			

<b>HP SCSI Tape Autoloaders</b>	External	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
DAT 72x10 Autoloader			
1/8 G2 Autoloader			

<b>HP SAS Tape Autoloaders and Libraries</b>	External	HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller	462828-B21
1/8 G2 Autoloader			
MSL2024			
MSL4048			
MSL8096			

<b>HP Fibre Channel Tape Libraries</b>	External	Please consult the EBS connectivity matrix at: <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpec.	
MSL2024			
MSL4048			
MSL8096			
MSL6000			

### Storage

<b>HP USB RDX Removable Disk Backup System</b> RDX160 RDX320 RDX500 RDX750 RDX1TB	External	USB 2.0 port	N/A
<b>HP D2D Backup Systems, iSCSI</b> D2D2500i D2D4000i	External	Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.	
<b>HP D2D Backup Systems, Fibre Channel</b> D2D4000fc	External	Direct server attach is not supported, requires connection via SAN fabric. See: <a href="http://www.hp.com/storage/SPOCK">http://www.hp.com/storage/SPOCK</a>	

### Power Specifications

HP 1200W Common Slot Silver Hot Plug Power Supply Kit							
Part Number	500172-B21						
Input Voltage Range ( V rms )	100 to 240						
Frequency Range (Nominal) ( Hz )	50/60						
Nominal Input Voltage ( Vrms )	<b>100</b>	<b>120</b>	<b>200</b>	<b>208</b>	<b>220</b>	<b>230</b>	<b>240</b>
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current ( A rms )	9.7	9.0	7.0	6.8	6.4	6.1	5.9
Maximum Rated Input Wattage Rating ( Watts )	930	1034	1348	1348	1348	1348	1348
Maximum Rated VA ( Volt-Amp )	970	1079	1406	1406	1406	1406	1406
Efficiency ( % )	86	86	89	89	89	89	89
Power Factor	0.97						
Leakage Current ( mA )	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current ( A peak )	30						
Maximum Inrush Current duration ( mS )	20						
Maximum British Thermal Unit Rating ( BTU-Hr )	3174	3530	4600	4600	4600	4600	4600

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit							
Part Number	578322-B21						
Input Voltage Range ( V rms )	100 to 240						
Frequency Range (Nominal) ( Hz )	50/60						
Nominal Input Voltage ( Vrms )	<b>100</b>	<b>120</b>	<b>200</b>	<b>208</b>	<b>220</b>	<b>230</b>	<b>240</b>
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current ( A rms )	9.3	8.6	6.7	6.5	6.1	5.8	5.6
Maximum Rated Input Wattage Rating ( Watts )	889	989	1290	1290	1290	1290	1290
Maximum Rated VA ( Volt-Amp )	927	1031	1345	1345	1345	1345	1345
Efficiency ( % )	90	91	93	93	93	93	93
Power Factor	0.97						
Leakage Current ( mA )	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current ( A peak )	30						
Maximum Inrush Current duration ( mS )	20						
Maximum British Thermal Unit Rating ( BTU-Hr )	3033	3375	4403	4403	4403	4403	4403

**NOTE:** To review typical system power ratings use the HP Power Advisor which is available online located at url: [www.hp.com/go/proliant-energy-efficient](http://www.hp.com/go/proliant-energy-efficient) or [www.hp.com/go/hppoweradvisor](http://www.hp.com/go/hppoweradvisor)

### Technical Specifications

<b>System Unit</b>	<b>Dimensions</b> (H x W x D) (with bezel)	6.94" x 19.0" x 27.55" (17.6cm x 48.3cm x 70.0cm)	
	<b>Weight</b> (approximate)	Maximum (all hard drives, power supplies, DIMMs and processors installed)	100.0 lb (45.4 kg)
		Minimum (one hard drive, two power supplies, four DIMMs, and two processors installed)	66.0 lb (30.0 kg)
<b>Input Requirements</b> (per power supply)	<b>Input Requirements</b> (per power supply)	Rated Line Voltage	100 - 127 VAC, 200 - 240 VAC
		Rated Input Current	12 A (at 100 VAC), 8 A (at 200 VAC)
		Rated Input Frequency	50 to 60 Hz
		Rated Input Power	1161 W (at 100 VAC), 1598 W (at 240 VAC)
<b>BTU Rating</b>		Maximum	3960 BTU/hr (at 100 VAC), 5450 BTU/hr (at 200 VAC)
<b>Power Specifications</b>	<p><b>NOTE:</b> To review typical system power ratings use the HP Power Advisor which is available online located at url: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a> or <a href="http://www.hp.com/go/hppoweradvisor">www.hp.com/go/hppoweradvisor</a></p> <p>- Click on the system of interest. Example: DL580 G7 - Follow the instructions of the next screens.</p>		
<b>Power Supply Output</b> (per power supply)	<b>Power Supply Output</b> (per power supply)	Rated Steady-State Power	910 W (low line), 1300 W (high line)
		Maximum Peak Power	910 W (low line), 1300 W (high line)
<b>System Inlet Temperature</b>	<b>System Inlet Temperature</b>	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
		Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
<b>Relative Humidity</b> (non-condensing)	<b>Relative Humidity</b> (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
		Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.



### Technical Specifications

<b>Altitude</b>	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	Idle	
	L WAd	6.4 B (with PCI-E)
	L pAm	NA dBA
	Operating	
	L WAd	6.8 B (with PCI-E)
L pAm	NA dBA	
<b>Emissions Classification (EMC)</b>	<b>FCC Rating</b>	Class A
	<b>Normative Standards</b>	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

**NOTE:** Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

<b>Integrated Lights-Out 3 (iLO 3) integrated on system board</b>	<b>Architecture</b>	PCI Express based health and remote management ASIC
	<b>Processor</b>	PCI Express RISC processor core running at 250MHz
	<b>Upgradeability</b>	Option firmware upgradeable via Flash ROM.
	<b>Interfaces</b>	One Ethernet Sideband connection (10/100/1000 Mb/s)
		One Ethernet network connection (10/100Mb/s)
	<b>Memory</b>	128-MB RAM with ECC
	<b>Operating System Support</b>	Microsoft Windows 2008 R2
		Microsoft Windows 2008 (32 bit and 64 bit)
		Microsoft Windows Server 2008 Standard Edition (32bit and 64bit)
		Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit)
Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise Edition		
Red Hat Enterprise Linux 5.4 (32 bit and 64 bit)		
SUSE LINUX Enterprise Server 11 (32bit and 64bit)		
SUSE LINUX Enterprise Server 10 (32bit and 64bit)		
VMware ESX 4.0		
VMware ESX 3.5.0		

### Technical Specifications

<b>Client System Support</b>	Solaris Microsoft Windows 7 Microsoft Windows XP Professional Edition Microsoft Windows Vista Business and Ultimate Editions Red Hat Enterprise Desktop 5.00 SUSE Linux Enterprise Desktop 11 SUSE Linux Enterprise Desktop 10
<b>Client Browser Support</b>	Microsoft Internet Explorer 8 Microsoft Internet Explorer 7 Microsoft Internet Explorer 6 Firefox 3.5 (on supported Windows and Linux systems) Firefox 3.0 (on supported Windows and Linux systems)
<b>Command Line Support</b>	Secure Shell and serial port access Secure Socket Layer Secure Shell version 2
<b>Security</b>	Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface AES encryption of video RC4 encryption of video
<b>Directory Support Services</b>	Active Directory v1.0 (Windows 2003)
<b>Driver Support</b>	HP ProLiant iLO3 Management Controller Driver Package
<b>Management protocols supported</b>	SNMP, IPMI 2.0 (system and LAN interface), DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP), HP RIBCL XML

---

<b>Smart Array P410i Controller</b>	<b>Dimensions</b>	Embedded
	<b>Disk Drive and Enclosure Interface - Transfer rate</b>	6Gb/s SAS (Serial Attached SCSI) 3Gb/s SATA (Serial ATA)
	<b>SAS Connectors</b>	2 internal 4X connectors
	<b>Cache Memory Speed</b>	DDR2-800MHz with 40 or 72-bit wide bus
	<b>Server Interface</b>	x4 PCIe 2.0 provides 2GB/s maximum bandwidth
	<b>SAS Speed</b>	8 6Gb/s SAS links provide 4.8GB/s maximum bandwidth
	<b>Cache Memory</b>	Zero Memory RAID has no cache memory 40-bit 256MB ECC protected cache (battery upgrade available) 72-bit 512MB BBWC or 72-bit 512MB and 1G FBWC
	<b>Logical Drives Supported</b>	Zero Memory, Up to 2 logical volumes (8 physical drives) Up to 64 logical drives with cache
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>RAID Support</b>	RAID 6, 6+0 (Advanced Data Guarding) <b>NOTE:</b> RAID 6, 6+0 can be enabled with one of the following combinations:

### Technical Specifications

- 256 MB cache, Battery kit and Smart Array Advanced Pack License key option upgrades
- 512 MB BBWC/FBWC and Smart Array Advanced Pack License key option upgrades
- 1G FBWC and Smart Array Advanced Pack License key option upgrades

RAID 5, 5+0 (Distributed Data Guarding)

**NOTE:** A minimum of 256 MB cache is required to enable RAID 5, 5+0 support

RAID 1+0 (Striping & Mirroring)

RAID 0 (Striping), RAID 1 (Mirroring)

---

<b>HP NC375i Integrated Quad Port Gigabit Server Adapter</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX	
	<b>Compatibility</b>	IEEE 802.3 10Base-T	
		IEEE 802.3ab 1000Base-T	
		IEEE 802.3u 100Base-TX	
		IEEE 802.3ad 1000Base-TX	
		IEEE 802.1p 100Base-TX	
		IEEE 802.1q 100Base-TX	
	<b>Data Transfer Method</b>	PCI-Express 2.0 x8	
	<b>Controller</b>	Qlogic/NetXen NX3031	
	<b>Network Transfer Rate</b>	10Base-T (Full-Duplex)	20 Mb/s
100Base-TX (Full-Duplex)		200 Mb/s	
1000Base-TX (Full-Duplex)		2000 Mb/s	
<b>Connector</b>	RJ-45		
<b>Cable Support</b>	10Base-T	Categories 3, 4, or 5 UTP; up to 328 ft (100 m)	
	100Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	
	1000Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	

---

<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> . To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
---	---	--

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### Technical Specifications

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Unix is a registered trademark of The Open Group. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.